


1	2	3	4	5	6	7
VSS	VDD	DAT	WR	CS	LED_CTRL	LED+

NOTE:LED_CTRL: 1=ON 0=OFF

SPECIFICATION:
 1.DISPLAY TYPE: TN/POSITIVE/TRANSMISSIVE
 2.VIEWING ANGLE: 6:00
 3.DRIVER METHOD: 1/4DUTY 1/3BIAS
 4.LCD OPERATION VOLTAGE: 3.3V
 5.OPERATION TEMPERATURE: 0°C--+50°C
 6.STORAGE TEMPERATURE: -10°C--+60°C
 7.POWER SUPPLY: 3.3V
 8.DRIVER IC: HT1621
 9.BACKLIGHT: YELLOWGREEN LED(3.3V,IF=30mA)
 10.ALL UNMARKED TOLERANCES: ±0.3mm

SinoCrystal (ShenZhen) Tech CO., LTD.			
绘图: LiuJun	产品型号: SCC0056-V01	单位: mm	
审核:	图纸编号: WXT-SCC0056-V01	日期: 2015.06.19	
批准:	图纸版号: A1	页数: 1/2	

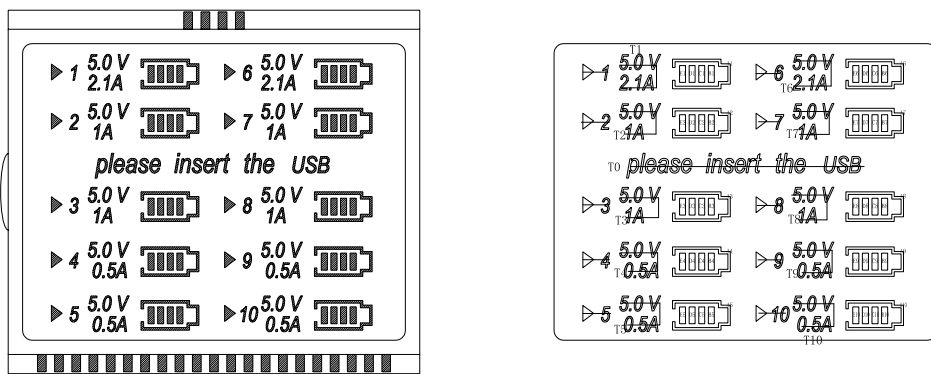

COM0						A5	A4	A3				A10	A9	A8	A7	A6		A2	A1		
COM1	1	2	3	4	5	B5	B4	B3	8	9	10	B10	B9	B8	B7	B6	6	7	B2	B1	
COM2	T1	T2	T3	T4	T5	C5	C4	C3	T8	T9	T10	C10	C9	C8	C7	C6	T6	T7	C2	C1	
COM3	E1	E2	T0	E3	E4	E5	D5	D4	D3	E8	E9	E10	D10	D9	D8	D7	D6	E6	E7	D2	D1

SinoCrystal (ShenZhen) Tech CO., LTD.			
绘图: LiuJun	产品型号: SCC0056-V01	单位: mm	
审核:	图纸编号: WXT-SCC0056-V01	日期: 2015.06.19	
批准:	图纸版号: A1	页数: 2/2	