


No.	PIN
1	LEDA
2	NC
3	VDD
4	VSS
5	VDD
6	SDA
7	SCL
8	LEDK

PIN	COM0	COM1	COM2	COM3
COM0	COM0			
COM1		COM1		
COM2			COM2	
COM3				COM3
SEG6	C8	S2	S1	C0
SEG7				C9
SEG8		4C	4B	4A
SEG9	4D	4E	4G	4F
SEG10	P1	3C	3B	3A
SEG11	3D	3E	3G	3F
SEG12	C10	2C	2B	2A
SEG13	2D	2E	2G	2F
SEG14	C11	1C	1B	1A
SEG15	1D	1E	1G	1F
SEG16				C7
SEG17		C13	C6	C5
SEG18	C1	C2	C3	C4
SEG19			S3	R7
SEG20		C12	S4	R6
SEG21	T3		T2	T1
SEG22	T4	8C	8B	8A
SEG23	8D	8E	8G	8F
SEG24	P2	7C	7B	7A
SEG25	7D	7E	7G	7F
SEG26		6C	6B	6A
SEG27	6D	6E	6G	6F
SEG28		5C	5B	5A
SEG29	5D	5E	5G	5F
SEG30			T10	T9
SEG31	T11		T5	T6
SEG32	T12			
SEG33	T7			
SEG34	T8			

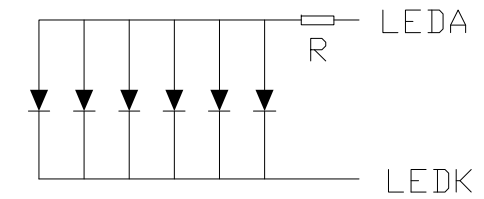

SPECIFICATION:
 1.DISPLAY TYPE:
 2.VIEWING ANGLE:
 3.DRIVER METHOD IC1:
 4.DRIVER METHOD IC2:
 5.OPERATION TEMPERATURE:
 6.STORAGE TEMPERATURE:
 7.DRIVER IC1/IC2:
 8.TOUCH IC:
 9.BACKLIGHT:
 10.ALL UNMARKED TOLERANCES:
 11.ROHS COMPLIANT.

FSTN/NEGATIVE/TRANSMISSVE
 6:00
 1/18DUTY 1/5BIAS VDP=5V VDD=5V
 1/4DUTY 1/3BIAS VDP=5V VDD=5V
 -10°C--+60°C
 -20°C--+70°C
 PCF2119SU / HT16C23G
 ANSG08
 WHITE LED (Vf=5.0V, If=90mA)
 ±0.2mm

SinoCrystal (ShenZhen) Tech CO., LTD.			
绘图: LiuJun	产品型号: SCC0064-V01	单位: mm	
审核:	图纸编号: WXT-SCC0064-V01	日期: 2017.06.07	
批准:	图纸版号: A0	页数: 1/1	